
LEDRAM
ledram.com

FİYAT LİSTESİ

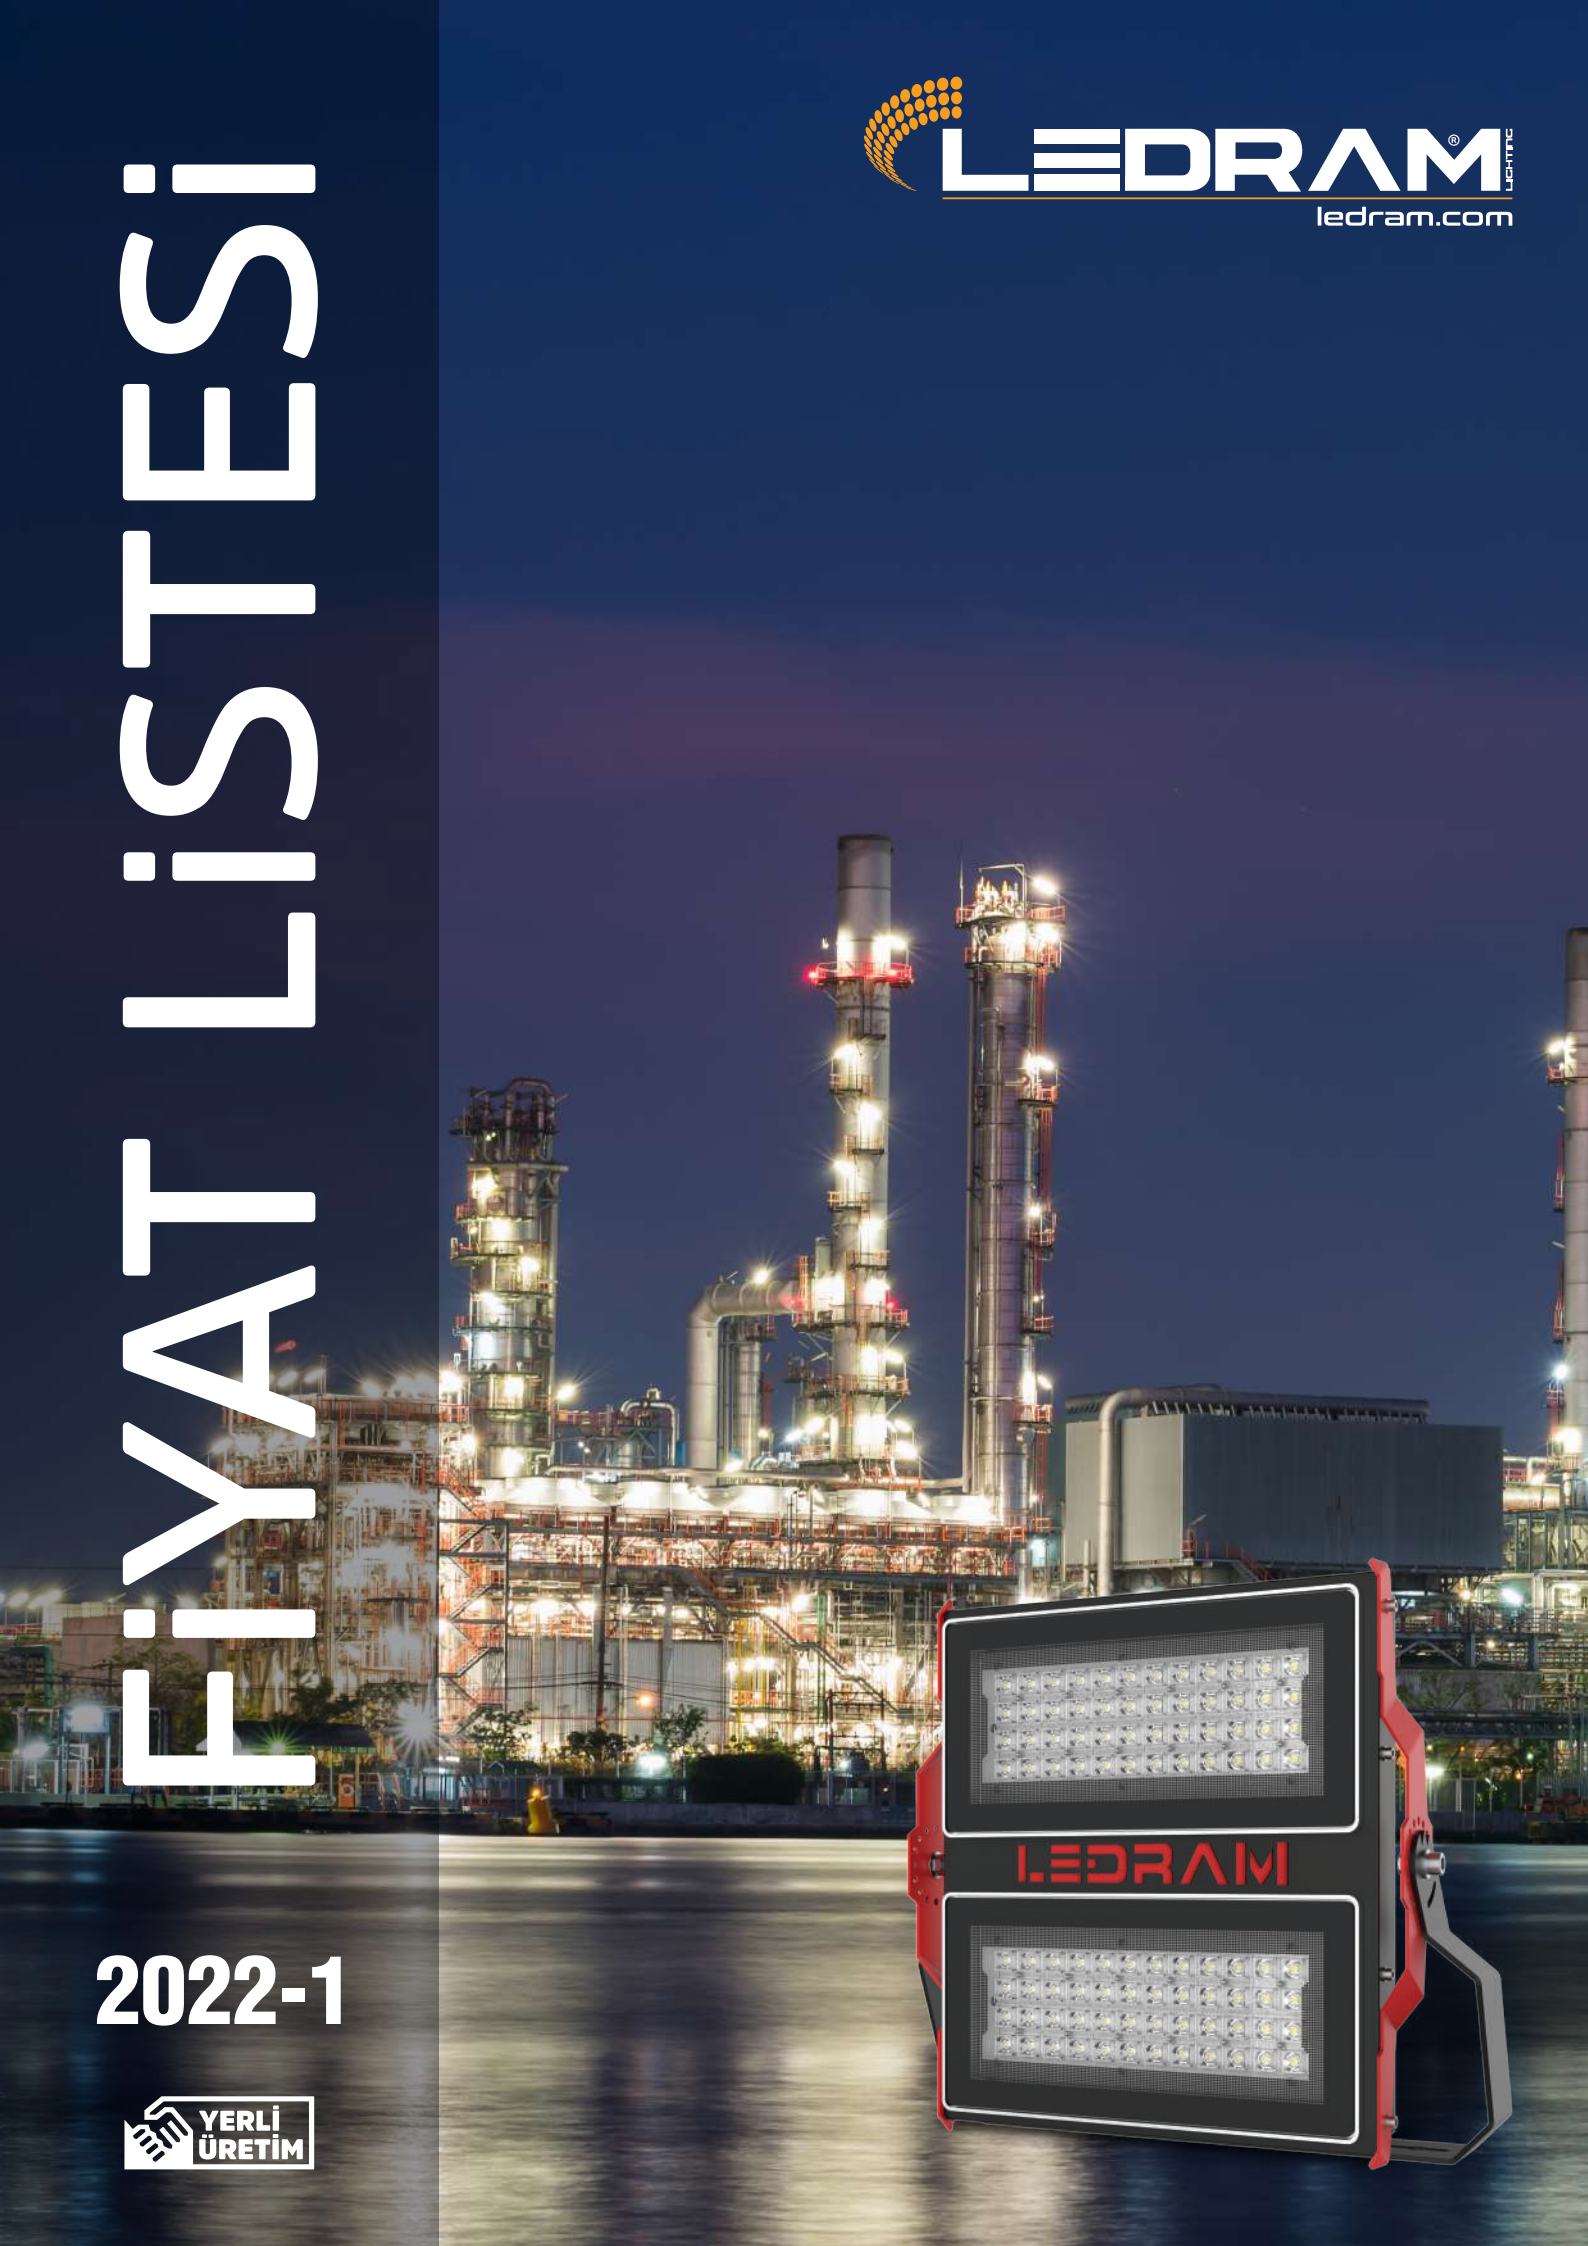

2022-1

YERLİ ÜRETİM

LEDRAM
Made in TURKIYE

AC-DIRECT®
ALTERNATIVE CURRENT DIRECT DRIVER
220-240VAC 50/60Hz.

IP66

CREE LED



GX SERİSİ YÜKSEK PERFORMANS DÜŞÜK ENERJİ

30W LED

50W LED

70W LED

100W LED

120W LED

LONG LIFE | Energy Saver | 220 VAC ▼▲ 240 VAC | no IR | no UV | CE | RoHS | CO_2 | INTERNATIONAL +C FEDERATION | LED | 60000 | IP66 | 2 years Warranty

LEDRAM LIGHTING
INDUSTRIAL LED LIGHTING and ENGINEERING



Kullanım Alanları / Application Areas

Profesyonel Uygulamalar - Professional Lights
Endüstri ve Sanayi Uygulamaları - Industrial Lights
Caddeler ve Sokaklar - Street Lights
Şehir Aydınlatmaları - City Lights
Park ve Alan Aydınlatmaları - Park and Area Lights
Kapalı ve Açık Garajlar - Garage Lights
Deniz Yolu ve Marin Sanayii - Marine Operations
Sabit ve Mobil İş Makineleri - Earthworks Operations
Sabit ve Mobil Askeri Uygulamalar - Fixed and Mobile Military Applications
Madencilik sektörü Aydınlatma - Mining industry Lighting
Metro ve Hava Alanları - Metro - Airport Area
Spor Kompleksi Aydınlatma - Sports Complex Lighting
Stadyum Aydınlatma - Stadium Lighting
Tünel Aydınlatma - Tunnel Lighting
Aydınlatma Kuleleri - Lighting Towers

GROUP OF COMPANIES
ALKANLAR A.Ş
Since 1973

AC-DIRECT
ALTERNATIVE CURRENT DIRECT DRIVER

SUPER COOLER
HIGH PERFORMANCE COOLING SYSTEM

SENSORMATIC

LEDRAM® Lighting
Made in TURKIYE

- Geleneksel yüksek tavan armatürlerinin yerine geçer.
- %60'a varan enerji tasarrufu
- 140 lm/W'a varan yüksek aydınlatma verimliliği
- Optimize edilmiş boyut ve ağırlıkla sıra dışı LEDRAM tasarımı
- Farklı montaj yükseklikleri için farklı ışık akısı ve ışık açıları mevcuttur.
- Aksesuarlar opsiyoneldir.
- Antrepo, endüstri, lojistik merkezleri gibi yüksek tavanlı mekanların genel aydınlatması için uygundur.

-Traditional high ceiling replaces fixtures.
- Energy savings of up to 60%
- as high as 140 lm / W lighting efficiency
- Optimized size and predominantly unusual LEDRAM design
- Different for different mounting heights luminous flux and light angles are available.
- Accessories are optional.
- Warehouse, industry, logistics centers high ceiling areas such as general suitable for lighting.



HIGHBAY Series - Lens

AC-DIRECT® ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
TITAN HIGHBAY-1000 LNS	100W	60°-90°	3000K-4000K-6500K	11000 Lm	Ø350xH10	3,00	1	$162,50
TITAN HIGHBAY-1500 LNS	150W	60°-90°	3000K-4000K-6500K	16500 Lm	Ø350xH10	3,00	1	$175,00
TITAN HIGHBAY-1750 LNS	175W	60°-90°	3000K-4000K-6500K	19250 Lm	Ø350xH10	3,00	1	$190,00

IP65 · IK 08 · CE · CRI 80 · lm/w 110 · 60000 · PF 0,95 · 2 years Warranty · -40°C Min · +45°C Max · LEDiL® Optics Lens · YERLİ ÜRETİM

NICHIA · CREE · SAMSUNG · LUMILEDS | LED

Optional Led / Opsiyonel Led

TITAN HIGHBAY

- Driver seçenekleri
- Sabit veya DALİ dim edilebilir
- 3-in-1 0~10Vdc
- On-Of zamanlayıcı karartma
- Opsiyonel montaj aparatları

- Driver options
- Fixed or DALI dimmable
- 3-in-1 0 ~ 10Vdc
- On-Of timer dimming
- Optional mounting apparatus

%60'a varan Enerji Tasarrufu



HIGHBAY Series - Lens & Driver

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
TITAN HIGHBAY-1000 LNSDRV	100W	60°-90°	3000K-4000K-6500K	14000 Lm	Ø350xH15	3,50	1	$230,00
TITAN HIGHBAY-1500 LNSDRV	150W	60°-90°	3000K-4000K-6500K	21000 Lm	Ø350xH15	3,50	1	$240,00
TITAN HIGHBAY-1750 LNSDRV	175W	60°-90°	3000K-4000K-6500K	24500 Lm	Ø350xH15	3,50	1	$255,00

IP65 · IK 08 · CE · CRI 80 · lm/w 140 · 40000 · PF 0,99 · 2 years Warranty · -40°C Min · +45°C Max · LEDiL Optics Lens · YERLİ ÜRETİM

PHILIPS · MOSO · INVENTRONICS · MEAN WELL

Optional Driver / Opsiyonel Sürücü




MKS Series

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
MKS-300-12	12W	180°	3000K-4000K-6500K	1080 Lm	50x300x70	0,35	12	$17,00
MKS-600	18W	180°	3000K-4000K-6500K	1620 Lm	50x565x70	0,60	12	$27,00
MKS-1200	36W	180°	3000K-4000K-6500K	3240 Lm	50x1160x70	1,20	12	$47,00
MKS-600 Color	18W	180°	Amber Red Green Blue	1620 Lm	50x565x70	0,60	12	$30,00
MKS-1200 Color	36W	180°	Amber Red Green Blue	3240 Lm	50x1160x70	1,20	12	$50,00
MKS-600 DC 24V +/-	18W	180°	3000K-4000K-6500K	1620 Lm	50x565x70	0,60	12	$32,00
MKS-1200 DC 24V +/-	36W	180°	3000K-4000K-6500K	3240 Lm	50x1160x70	1,20	12	$55,00
MKS-600 110V AC	18W	180°	3000K-4000K-6500K	1620 Lm	50x565x70	0,60	12	$30,00
MKS-1200 110V AC	36W	180°	3000K-4000K-6500K	3240 Lm	50x1160x70	1,20	12	$50,00

IP65 IK 06 CE CRI 80 lm/w 90 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM

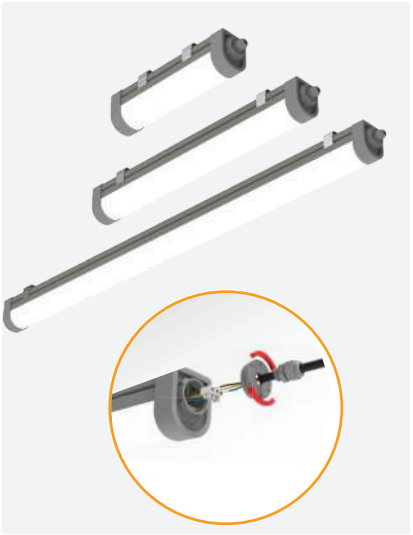

MK Series

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
MK-300-15	15W	180°	3000K-4000K-6500K	1350 Lm	70x300x85	0,45	12	$25,50
MK-600-20	20W	180°	3000K-4000K-6500K	1800 Lm	70x580x85	1,00	12	$31,50
MK-600-30	30W	180°	3000K-4000K-6500K	2700 Lm	70x580x85	1,00	12	$40,00
MK-1200-40	40W	180°	3000K-4000K-6500K	3600 Lm	70x1180x85	1,75	12	$55,00
MK-1200-80	80W	180°	3000K-4000K-6500K	7200 Lm	70x1180x85	2,50	12	$85,00
MK-600-DC 24V +/-	20W	180°	3000K-4000K-6500K	1800 Lm	70x580x85	1,00	12	$35,00
MK-1200-DC 24V +/-	40W	180°	3000K-4000K-6500K	3600 Lm	70x1180x85	1,75	12	$65,00
MK-600-110V AC	20W	180°	3000K-4000K-6500K	1800 Lm	70x580x85	1,00	12	$35,00
MK-1200-110V AC	40W	180°	3000K-4000K-6500K	3600 Lm	70x1180x85	1,75	12	$65,00
MK-600 Radar Sensör	20W	180°	3000K-4000K-6500K	1800 Lm	70x580x85	1,00	12	$60,00
MK-1200 Radar Sensör	40W	180°	3000K-4000K-6500K	3600 Lm	70x1180x85	1,75	12	$85,00
MK-300A Acil Kitli	18W	180°	3000K-4000K-6500K	1350 Lm	70x300x85	0,55	12	$70,50
MK-600A Acil Kitli	20W	180°	3000K-4000K-6500K	1800 Lm	70x580x85	1,25	12	$80,00
MK-1200A Acil Kitli	40W	180°	3000K-4000K-6500K	3600 Lm	70x1180x85	2,00	12	$110,00

IP65 IK 06 CE CRI 80 lm/w 90 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM



LS Series

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
LS-600	10W	180°	3000K-4000K-6500K	900 Lm	35x600x45	0,25	12	$16,50
LS-1200	18W	180°	3000K-4000K-6500K	1620 Lm	35x1200x45	0,45	12	$28,00

IP20 IK 06 CE CRI 80 lm/w 90 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM



ECO Series

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
ECO - 600	18W	180°	3000K-4000K-6500K	1440 Lm	70x600x25	0,15	12	$10,00
ECO - 1200	36W	180°	3000K-4000K-6500K	2880 Lm	70x1200x25	0,30	12	$12,00

IP20 IK 06 CE CRI 80 lm/w 80 30000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM

LEDRAM Made in TURKIYE

NICHIA CREE SAMSUNG LUMILEDS LED

Optional Led / Opsiyonel Led

YERLİ ÜRETİM



MAX-5000

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
MAX-5000-50	50w	120°	3000K-4000K-6500K	5500 Lm	95x170x400	1,35	6	$66,00
MAX-5000-70	70w	120°	3000K-4000K-6500K	7700 Lm	95x170x400	1,35	6	$74,00
MAX-5000-100	100w	120°	3000K-4000K-6500K	11000 Lm	95x170x400	1,35	6	$76,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM



MAX-5000 Lens

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
MAX-5000-70 LNS	70w	70°x150°	3000K-4000K-6500K	7700 Lm	95x170x400	1,40	6	$82,00
MAX-5000-100 LNS	100w	70°x150°	3000K-4000K-6500K	11000 Lm	95x170x400	1,40	6	$85,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

LEDiL® Optics Lens



MAX-7000 Lens

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
MAX-7000-150 LNS	150w	70°x150°	3000K-4000K-6500K	16500 Lm	95x240x500	3,25	3	$160,00
MAX-7000-200 LNS	200w	70°x150°	3000K-4000K-6500K	22000 Lm	95x240x500	3,25	3	$165,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

LEDiL® Optics Lens



MAX-7000 Lens & Driver

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
MAX-7000-100 LNSDRV	100w	70°x150°	3000K-4000K-6500K	13000 Lm	95x240x500	4,50	3	$215,00
MAX-7000-150 LNSDRV	150w	70°x150°	3000K-4000K-6500K	19500 Lm	95x240x500	4,50	3	$225,00
MAX-7000-200 LNSDRV	200w	70°x150°	3000K-4000K-6500K	26000 Lm	95x240x500	4,50	3	$240,00

IP66 IK 09 CE CRI 80 lm/w 130 60000 PF 0,99 2 years Warranty -40°C Min +45°C Max

LEDiL® Optics Lens

PHILIPS MOSO® INVENTRONICS MEAN WELL

Optional Driver / Opsiyonel Sürücü





GX Series

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GX-30	30W	120°	3000K-4000K-6500K	3300 Lm	30x90x150	3,00	6	$35,00
GX-50	50W	120°	3000K-4000K-6500K	5500 Lm	30x90x150	3,00	6	$38,00
GX-70	70W	120°	3000K-4000K-6500K	7700 Lm	30x90x150	3,00	6	$60,00
GX-100	100W	120°	3000K-4000K-6500K	11000 Lm	30x160x240	3,00	6	$65,00
GX-120	120W	120°	3000K-4000K-6500K	13200 Lm	30x160x240	3,00	6	$75,00

IP66 IK 09 CE CRI 80 lm/w 110 50000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM





GM Series

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GM-30	30W	120°	3000K-4000K-6500K	3300 Lm	65x190x120	2,00	6	$60,00
GM-50	50W	120°	3000K-4000K-6500K	5500 Lm	65x190x120	2,00	6	$62,00
GM-30 12/24V DC +/-	30W	120°	3000K-4000K-6500K	3300 Lm	65x190x120	2,00	6	$115,00
GM-50 12/24V DC +/-	50W	120°	3000K-4000K-6500K	5500 Lm	65x190x120	2,00	6	$120,00
GM-30 110V AC	30W	120°	3000K-4000K-6500K	3300 Lm	65x190x120	2,00	6	$65,00
GM-50 110V AC	50W	120°	3000K-4000K-6500K	5500 Lm	65x190x120	2,00	6	$70,00
GM-70	70W	120°	3000K-4000K-6500K	7700 Lm	65x250x180	3,00	6	$87,00
GM-100	100W	120°	3000K-4000K-6500K	11000 Lm	65x250x180	3,00	6	$89,00
GM-150	150W	120°	3000K-4000K-6500K	16500 Lm	65x410x210	4,50	3	$150,00
GM-200	200W	120°	3000K-4000K-6500K	22000 Lm	65x410x210	4,50	3	$160,00
GM-100 12/24V DC +/-	100W	120°	3000K-4000K-6500K	11000 Lm	65x250x180	3,00	6	$150,00
GM-70 110V AC	70W	120°	3000K-4000K-6500K	7700 Lm	65x250x180	3,00	6	$90,00
GM-100 110V AC	100W	120°	3000K-4000K-6500K	11000 Lm	65x250x180	3,00	6	$92,00

IP66 IK 09 CE CRI 80 lm/w 110 50000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM



GTP-1000

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GTP-1000-30	30W	120°	3000K-4000K-6500K	3300 Lm	80x190x120	2,00	6	$61,00
GTP-1000-50	50W	120°	3000K-4000K-6500K	5500 Lm	80x190x120	2,00	6	$63,00
GTP-1000-30 Color	30W	120°	Amber Red Green Blue	2700 Lm	80x190x120	2,00	6	$63,00
GTP-1000-50 Color	50W	120°	Amber Red Green Blue	4500 Lm	80x190x120	2,00	6	$65,00

IP66 IK 09 CE CRI 80 lm/w 110 50000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM



GTP-2000

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GTP-2000-70	70W	120°	3000K-4000K-6500K	7700 Lm	80x250x180	3,00	6	$88,00
GTP-2000-100	100W	120°	3000K-4000K-6500K	11000 Lm	80x250x180	3,00	6	$90,00
GTP-2000-70 Color	70W	120°	Amber Red Green Blue	6300 Lm	80x250x180	3,00	6	$90,00
GTP-2000-100 Color	100W	120°	Amber Red Green Blue	9000 Lm	80x250x180	3,00	6	$92,00

IP66 IK 09 CE CRI 80 lm/w 110 50000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM



DELTA-1000

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-1000-70	70W	120°	3000K-4000K-6500K	7700 Lm	150x400x260	5,00	3	$130,00
DELTA-1000-100	100W	120°	3000K-4000K-6500K	11000 Lm	150x400x260	5,00	3	$135,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM




DELTA-2000

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-2000 Y	200W	120°	3000K-4000K-6500K	22000 Lm	150x655x260	7,75	1	$235,00
DELTA-2000 D	200W	120°	3000K-4000K-6500K	22000 Lm	150x400x465	8,75	1	$235,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM

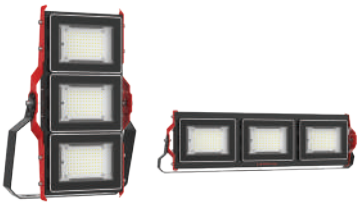

DELTA-3000

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-3000 Y	300W	120°	3000K-4000K-6500K	33000 Lm	150x900x260	11,25	1	$335,00
DELTA-3000 D	300W	120°	3000K-4000K-6500K	33000 Lm	150x400x600	12,25	1	$335,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM



DELTA-4000

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-4000	400W	120°	3000K-4000K-6500K	44000 Lm	150x750x465	15,50	1	$430,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM



DELTA-6000

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-6000	600W	120°	3000K-4000K-6500K	66000 Lm	150x960x465	25,00	1	$635,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM



DELTA-8000

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-8000	800W	120°	3000K-4000K-6500K	88000 Lm	150x960x465	28,50	1	$840,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM



DELTA-9000

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-9000	1000W	120°	3000K-4000K-6500K	110000 Lm	150x900x600	30,00	1	$915,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

SUPER COOLER HIGH PERFORMANCE COOLING SYSTEM




DELTA-1000 Lens

AC-DIRECT® ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle Optional	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-1000-70 LNS	70W	30°-60°-90°	3000K-4000K-6500K	7700 Lm	150x400x260	5,00	3	$150,00
DELTA-1000-100 LNS	100W	30°-60°-90°	3000K-4000K-6500K	11000 Lm	150x400x260	5,00	3	$155,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

LEDiL® Optics Lens

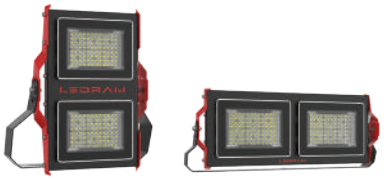

DELTA-2000 Lens

AC-DIRECT® ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle Optional	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-2000 YLNS	200W	30°-60°-90°	3000K-4000K-6500K	22000 Lm	150x655x260	7,75	1	$250,00
DELTA-2000 DLNS	200W	30°-60°-90°	3000K-4000K-6500K	22000 Lm	150x400x465	8,75	1	$250,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

LEDiL® Optics Lens



DELTA-3000 Lens

AC-DIRECT® ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle Optional	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-3000 YLNS	300W	30°-60°-90°	3000K-4000K-6500K	33000 Lm	150x900x260	11,25	1	$355,00
DELTA-3000 DLNS	300W	30°-60°-90°	3000K-4000K-6500K	33000 Lm	150x400x600	12,25	1	$355,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

LEDiL® Optics Lens





DELTA-4000 Lens

AC-DIRECT® ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle Optional	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-4000 LNS	400W	30°-60°-90°	3000K-4000K-6500K	44000 Lm	150x750x465	15,50	1	$460,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40ºC Min +45ºC Max LEDiL® Optics Lens



DELTA-6000 Lens

AC-DIRECT® ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle Optional	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-6000 LNS	600W	30°-60°-90°	3000K-4000K-6500K	66000 Lm	150x960x465	25,00	1	$675,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40ºC Min +45ºC Max LEDiL® Optics Lens




DELTA-8000 Lens

AC-DIRECT® ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle Optional	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-8000 LNS	800W	30°-60°-90°	3000K-4000K-6500K	88000 Lm	150x960x465	28,50	1	$890,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40ºC Min +45ºC Max LEDiL® Optics Lens



DELTA-9000 Lens

AC-DIRECT® ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle Optional	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-9000 LNS	1000W	30°-60°-90°	3000K-4000K-6500K	1 10000 Lm	150x900x600	30,00	1	$960,00

IP66 IK 09 CE CRI 80 lm/w 110 60000 PF 0,95 2 years Warranty -40ºC Min +45ºC Max LEDiL® Optics Lens





DELTA-1000 Lens & Driver

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-1000-70 LNSDRV	70W	30°-60°-90°	3000K-4000K-6500K	9100 Lm	150x400x260	5,50	3	$190,00
DELTA-1000-100 LNSDRV	100W	30°-60°-90°	3000K-4000K-6500K	13000 Lm	150x400x260	5,50	3	$205,00


IP66 IK 09 CE CRI 80 lm/w 130 60000 PF 0,99 2 years Warranty -40°C Min +45°C Max LEDiL® Optics Lens



DELTA-1500 Lens & Driver

Model No	Power @230 VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-1500 YLNSDRV	150W	30°-60°-90°	3000K-4000K-6500K	19500 Lm	150x655x260	8,25	1	$315,00
DELTA-1500 DLNSDRV	150W	30°-60°-90°	3000K-4000K-6500K	19500 Lm	150x400x465	9,25	1	$315,00

IP66 IK 09 CE CRI 80 lm/w 130 60000 PF 0,99 2 years Warranty -40°C Min +45°C Max LEDiL® Optics Lens

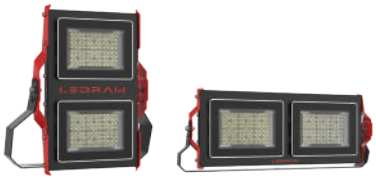

DELTA-2000 Lens & Driver

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-2000Y LNSDRV	200W	30°-60°-90°	3000K-4000K-6500K	26000 Lm	150x655x260	8,25	1	$335,00
DELTA-2000 DLNSDRV	200W	30°-60°-90°	3000K-4000K-6500K	26000 Lm	150x400x465	9,25	1	$335,00

IP66 IK 09 CE CRI 80 lm/w 130 60000 PF 0,99 2 years Warranty -40°C Min +45°C Max LEDiL® Optics Lens



DELTA-3000 Lens & Driver

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-3000 YLNSDRV	300W	30°-60°-90°	3000K-4000K-6500K	39000 Lm	150x900x260	12,25	1	$520,00
DELTA-3000 DLNSDRV	300W	30°-60°-90°	3000K-4000K-6500K	39000 Lm	150x400x600	13,25	1	$520,00

IP66 IK 09 CE CRI 80 lm/w 130 60000 PF 0,99 2 years Warranty -40°C Min +45°C Max LEDiL® Optics Lens

PHILIPS MOSO® INVENTRONICS MEAN WELL

Optional Driver / Opsiyonel Sürücü





DELTA-4000 Lens & Driver

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-4000 LNSDRV	400W	30°-60°-90°	3000K-4000K-6500K	52000 Lm	150x750x465	17,00	1	$650,00

IP66 IK 09 CE CRI 80 lm/w 130 60000 PF 0,99 2 years Warranty -40ºC Min +45ºC Max

LEDiL® Optics Lens



DELTA-6000 Lens & Driver

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-6000 LNSDRV	600W	30°-60°-90°	3000K-4000K-6500K	78000 Lm	150x960x465	28,00	1	$950,00

IP66 IK 09 CE CRI 80 lm/w 130 60000 PF 0,99 2 years Warranty -40ºC Min +45ºC Max

LEDiL® Optics Lens




DELTA-8000 Lens & Driver

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-8000 LNSDRV	800W	30°-60°-90°	3000K-4000K-6500K	104000 Lm	150x960x465	30,50	1	$1.250,00

IP66 IK 09 CE CRI 80 lm/w 130 60000 PF 0,99 2 years Warranty -40ºC Min +45ºC Max

LEDiL® Optics Lens



DELTA-9000 Lens & Driver


Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DELTA-9000-1000 LNSDRV	1000W	30°-60°-90°	3000K-4000K-6500K	130000 Lm	150x900x600	33,00	1	$1.400,00

IP66 IK 09 CE CRI 80 lm/w 130 60000 PF 0,99 2 years Warranty -40ºC Min +45ºC Max

LEDiL® Optics Lens

PHILIPS MOSO® INVENTRONICS MEAN WELL

Optional Driver / Opsiyonel Sürücü

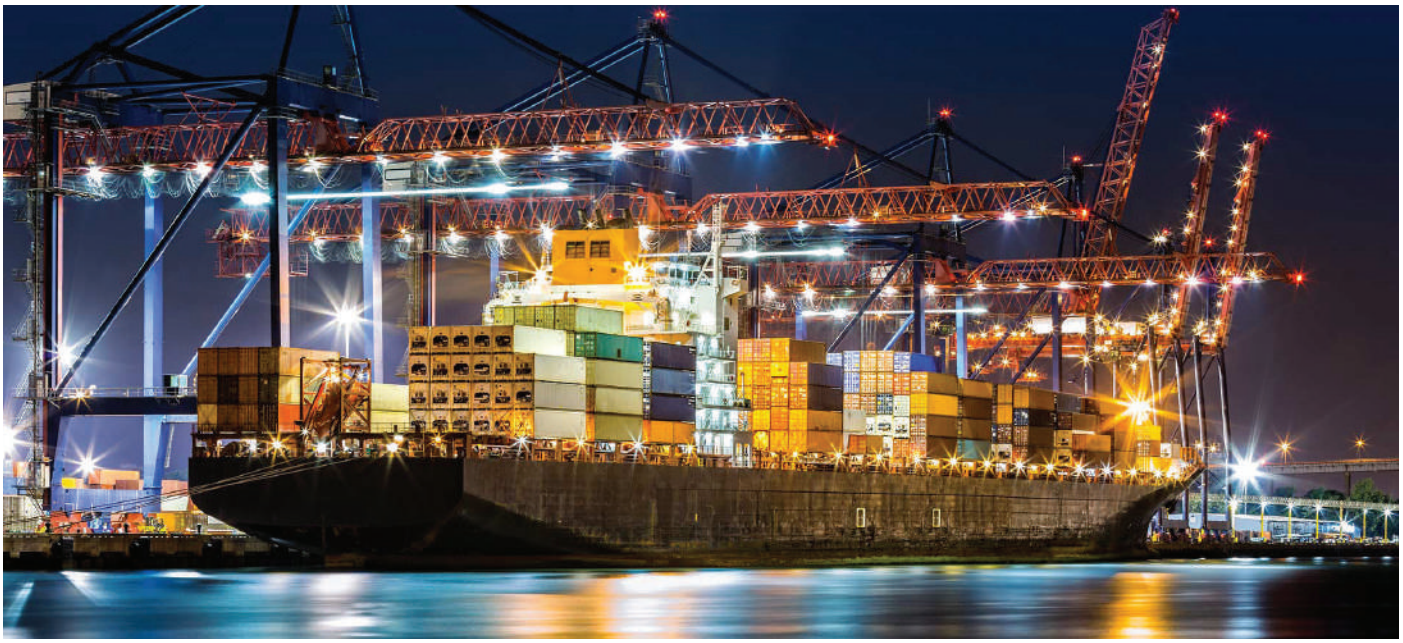



GAMMA Series - Lens

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-1500 LNS	150W	30°-60°-90°	3000K-4000K-6500K	18000 Lm	150x550x270	7,00	1	$250,00
GAMMA-2000 LNS	200W	30°-60°-90°	3000K-4000K-6500K	24000 Lm	150x550x270	7,00	1	$260,00

IP66 IK 09 CE CRI 80 lm/w 120 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

LEDiL® Optics Lens



GAMMA Series - Lens

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-3000 LNS	300W	30°-60°-90°	3000K-4000K-6500K	36000 Lm	150x550x550	15,00	1	$405,00
GAMMA-4000 LNS	400W	30°-60°-90°	3000K-4000K-6500K	48000 Lm	150x550x550	15,00	1	$470,00

IP66 IK 09 CE CRI 80 lm/w 120 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

LEDiL® Optics Lens



GAMMA Series - Lens

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-6000 LNS	600W	30°-60°-90°	3000K-4000K-6500K	72000 Lm	150x550x900	22,50	1	$760,00

IP66 IK 09 CE CRI 80 lm/w 120 60000 PF 0,95 2 years Warranty -40°C Min +45°C Max

LEDiL® Optics Lens





GAMMA Series - Lens

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-8000 LNS	800W	30°-60°-90°	3000K-4000K-6500K	96000 Lm	150x1000x550	28,00	1	$900,00

IP66 IK 09 CE CRI 80 lm/w 120 60000 PF 0,95 2 years Warranty -40ºC Min +45ºC Max

LEDiL® Optics Lens



GAMMA Series - Lens

AC-DIRECT® ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-12000 LNS	1200W	30°-60°-90°	3000K-4000K-6500K	144000 Lm	150x1000x900	35,00	1	$1.250,00

IP66 IK 09 CE CRI 80 lm/w 120 60000 PF 0,95 2 years Warranty -40ºC Min +45ºC Max

LEDiL® Optics Lens



GAMMA Series - Lens

AC-DIRECT® ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-16000 LNS	1600W	30°-60°-90°	3000K-4000K-6500K	192000 Lm	150x1000x1100	55,00	1	$1.700,00

IP66 IK 09 CE CRI 80 lm/w 120 60000 PF 0,95 2 years Warranty -40ºC Min +45ºC Max

LEDiL® Optics Lens



LEDRAM
Made in TURKIYE



SPORT - 2X2 LENS



LEDiL®



GAMMA Series - Lens & Driver

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-1500 LNSDRV	150W	10°-20°-50°	3000K-4000K-6500K	22500 Lm	150x550x270	8,00	1	$395,00
GAMMA-2000 LNSDRV	200W	10°-20°-50°	3000K-4000K-6500K	30000 Lm	150x550x270	8,00	1	$410,00
GAMMA-2500 LNSDRV	250W	10°-20°-50°	3000K-4000K-6500K	37500 Lm	150x550x270	8,00	1	$430,00

IP66 IK 09 CE CRI 70 lm/w 150 60000 PF 0,99 2 years Warranty -40°C Min +45°C Max LEDiL Optics Lens



GAMMA Series - Lens & Driver

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-3000 LNSDRV	300W	10°-20°-50°	3000K-4000K-6500K	45000 Lm	150x550x550	16,00	1	$685,00
GAMMA-4000 LNSDRV	400W	10°-20°-50°	3000K-4000K-6500K	60000 Lm	150x550x550	16,00	1	$800,00
GAMMA-5000 LNSDRV	500W	10°-20°-50°	3000K-4000K-6500K	75000 Lm	150x550x550	16,00	1	$850,00

IP66 IK 09 CE CRI 70 lm/w 150 60000 PF 0,99 2 years Warranty -40°C Min +45°C Max LEDiL Optics Lens



GAMMA Series - Lens & Driver

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-6000 LNSDRV	600W	10°-20°-50°	3000K-4000K-6500K	90000 Lm	150x550x550	24,00	1	$1.300,00
GAMMA-7000 LNSDRV	700W	10°-20°-50°	3000K-4000K-6500K	105000 Lm	150x550x550	24,00	1	$1.400,00

IP66 IK 09 CE CRI 70 lm/w 150 60000 PF 0,99 2 years Warranty -40°C Min +45°C Max LEDiL Optics Lens



GAMMA Series - Lens & Driver

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-8000 LNSDRV	800W	10°-20°-50°	3000K-4000K-6500K	120000 Lm	150x1000x550	30,00	1	$1.550,00
GAMMA-10000 LNSDRV	1000W	10°-20°-50°	3000K-4000K-6500K	150000 Lm	150x1000x550	30,00	1	$1.650,00

IP66 IK 09 CE CRI 70 lm/w 150 60000 PF 0,99 2 years Warranty -40°C Min +45°C Max LEDiL Optics Lens



GAMMA Series - Lens & Driver

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-12000 LNSDRV	1200W	10°-20°-50°	3000K-4000K-6500K	180000 Lm	150x1000x900	38,00	1	$2.200,00
GAMMA-14000 LNSDRV	1400W	10°-20°-50°	3000K-4000K-6500K	210000 Lm	150x1000x900	38,00	1	$2.400,00

IP66 IK 09 CE CRI 70 lm/w 150 60000 PF 0,99 2 years Warranty -40°C Min +45°C Max LEDiL Optics Lens



GAMMA Series - Lens & Driver

Model No	Power @220VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
GAMMA-16000 LNSDRV	1600W	10°-20°-50°	3000K-4000K-6500K	240000 Lm	150x1000x1100	59,00	1	$2.900,00
GAMMA-20000 LNSDRV	2000W	10°-20°-50°	3000K-4000K-6500K	300000 Lm	150x1000x1100	59,00	1	$3.100,00

IP66 IK 09 CE CRI 70 lm/w 150 60000 PF 0,99 2 years Warranty -40°C Min +45°C Max LEDiL Optics Lens

PHILIPS MOSO INVENTRONICS MEAN WELL

Optional Driver / Opsiyonel Sürücü



DS-240 S/SA

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
DS-240S	15W	180°	3000K-4000K-6500K	1200 Lm	Ø240xH70	0,60	12	$24,00
DS-240SA Acil Kitli	15W	180°	3000K-4000K-6500K	1200 Lm	Ø240xH70	0,80	12	$60,50

*Opsiyonel Ürün - Optional Complement

IP20 IK 08 CE CRI 80 lm/w 80 60000 PF 0,95 2 years Warranty -20°C Min +45°C Max



SR-240 S/SA

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
SR-240S	15W	180°	3000K-4000K-6500K	1200 Lm	Ø240xH70	0,60	12	$24,00
SR-240SA Acil Kitli	15W	180°	3000K-4000K-6500K	1200 Lm	Ø240xH70	0,80	12	$60,50

*Opsiyonel Ürün - Optional Complement

IP20 IK 08 CE CRI 80 lm/w 80 60000 PF 0,95 2 years Warranty -20°C Min +45°C Max



MS-260 / S

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
MS-260	15W	180°	3000K-4000K-6500K	1200 Lm	Ø240xH70	0,60	12	$13,00
MS-260S Sensörlü	15W	180°	3000K-4000K-6500K	1200 Lm	Ø240xH70	0,80	12	$18,50

*Opsiyonel Ürün - Optional Complement

IP20 IK 08 CE CRI 80 lm/w 80 60000 PF 0,95 2 years Warranty -20°C Min +45°C Max



SR/DS-240 / A

AC-DIRECT ALTERNATIVE CURRENT DIRECT DRIVER

Model No	Power @230VAC	Angle	Color Kelvin	Luminous Flux (LED)	Dimensions (WxLxH) mm	Weight Kg.	Box Qty./Pcs.	Price USD
SR-240	15W	180°	3000K-4000K-6500K	1200 Lm	Ø240xH70	0,50	12	$15,50
DS-240	15W	180°	3000K-4000K-6500K	1200 Lm	Ø240xH70	0,50	12	$15,50

*Opsiyonel Ürün - Optional Complement

IP20 IK 08 CE CRI 80 lm/w 80 60000 PF 0,95 2 years Warranty -20°C Min +45°C Max

Açıklamalar:

- Yeni liste yayınlandığında iş bu listenin geçerliliği yoktur.
- Ürünlerimizin tamamı teknik ve malzeme yapısı sebebi ile oluşabilecek arızalara karşı 2 yıl süresince firmamızın garantisi altındadır.
- Fiyatlara KDV dahil değildir.
- LEDRAM tasarımları değiştirme hakkını saklı tutar.
- Tüm ürünlerin teknik yapısı ve tasarımları patentlidir.
- Tüm ürünlerde orjinal Cree LED kullanılmaktadır.
- Opsiyonel ürünler için firmamız ile iletişime geçilmelidir.
- Teslimatlar stok durumuna ve üretim planlamasına göre değişiklik gösterebilir.
- Ürün kataloğundaki kod, özellikler, fiyat vs gibi herhangi bir hatadan satıcı firma sorumlu değildir.
- Hata ve Unutma müstesnadır.
- Kurulum sırasında topraklama kablosunu bağladığınızdan emin olun.

Explanation:

- This list is not valid when the new list is published.
- All our products are warranty for 2 years against technical and material defects.
- VAT is not included in the prices. (for TURKIYE)
- LEDRAM reserves the right to change designs.
- The technical structure and designs of all products are patented.
- All products use original Cree LEDs.
- For Optional products should be contacted with our company.
- Deliveries may vary depending on stock status and production planning.
- The seller is not responsible for any errors in the product catalog such as code, specifications, price etc.
- E&OE / Errors and Omissions Excepted.
- Be sure to connect the ground wire during installation.

İKON AÇIKLAMALARI

IP 20	12.5 mm'den büyük katı cisimlere karşı korumalı
IP 65	Toz geçirmez, her yönden püskürtülen su jetine karşı korumalı
IP 66	Toz geçirmez, her yönden püskürtülen şiddetli su jetine karşı korumalı
IK06	500 g ağırlığında bir cismin 20 cm yüksekliğinden düşmeye karşı korumalı
IK08	1,7 kg ağırlığında bir cismin 29,5 cm yüksekliğinden düşmeye karşı korumalı
IK09	5 kg ağırlığında bir cismin 20 cm yüksekliğinden düşmeye karşı korumalı
CRI 70	Renksel Geriverim İndeksi %70
CRI 80	Renksel Geriverim İndeksi %80
CE	CE işareti; Avrupa Birliğinin (AB), teknik mevzuat uyumu çerçevesinde malların serbest dolaşımının tam anlamıyla sağlanması amacıyla, ürünlerin teknik yapılarına ilişkin mevzuatı daha basit ve genel hale getirmek için, 1985 yılında benimsediği Yeni Yaklaşım Politikası kapsamında hazırlanan Yeni Yaklaşım Direktifleri kapsamına giren ürünlerin bu direktiflere uygun olduğunu ve gerekli bütün uygunluk değerlendirme faaliyetlerinden geçtiğini sağlık, güvenlik ve tüketicinin ve çevrenin korunması gerekliliklerine uygunluğunu gösteren ve Conformité Européenne kelimelerinin baş harflerinden oluşan bir birlik işareti
ENEC	Avrupa Elektrik Normları Belgelendirme kısaltmasıdır. Elektrik ve elektronik ürünlerde güvenlik Kuruluşları tarafından onaylı olduğunun işareti
lm/w	Bir ışık kaynağı, bir watt güç harcayarak kaç lümen ışık çıktısı sunuyorsa bu ışık verimidir. ... Işık akısının güce oranı, watt başına lümen cinsinden ifade edilir ve lm/W şeklinde sembolize edilir.
Lümen	Bir led ışık sağlamak için çevreye yaydığı toplam (insan gözüne göre) ışık miktarını yada ışık gücünü ölçmek için kullanılan Uluslararası birime lümen denir. Basit bir ifadeyle, Lümen (lm) ile gösterilir.
Kelvin	Renk sıcaklığı (CCT), ışık kaynağının yaydığı görünür ışığın sahip olduğu ışık rengini belirtir. CCT'nin açılımı Correlated Color Temperature'dır ve İlişkili Renk Sıcaklığı anlamına gelir.(K) Işık kaynağının rengini derecelendiren ve tanımlayan ifadedir.
	Ürün ömür veya Kullanım süreci (Time Life) ifade sembolü
	Topraklama gerekmez ifade sembolü
	Topraklama gerekir ifada sembolleri
DC +/-	Doğru Akım ifade sembolü
XX°C - min	Minimum ortam sıçaklığı ifade sembolü
XX°C + max	Maksimun ortam sıçaklığı ifade sembolü
AC-D	ALTERNATIVE CURRENT DIRECT DRIVER
LNS	Optic Lens ifade sembolü
DRV	Harici Driver ifade sembolü
4h	4 saat Acil kit ifade sembolü
LxWxH	Length width height Uzunluk (derinlik) genişlik Yükseklik
PF	Güç Faktörü (Power factor) Alternatif akım (AC) devrelerde, devre üzerinde kullanılan gerçek gücün, devreye verilen görünür güce oranına güç faktörü denir. Güç faktörü 0 ile 1 arasında değer alabilir. Bu değerin 1'e yakın olması arzu edilen durumdur.

LEDRAM®
LIGHTING
Made in TURKIYE

Ledram Aydınlatma Elektrik Elektronik San. ve Tic. Ltd Şti.
LEDRAM LIGHTING INDUSTRY CO. LTD.
Fatih Mah. Yakacık Yolu Cad. Ortadağ Mevkii No:37/A
34885 Sancaktepe İSTANBUL / TÜRKİYE
Tel: +90 216 564 57 00 Fax: +90 216 561 28 19
info@ledram.com www.ledram.com

GROUP OF COMPANIES
ALKANLAR A.Ş
Since 1973

Türkiye